

Addendum No. 2 - Bid No. 25-41

April 9, 2025

To all bidders for furnishing all labor and materials necessary and required for constructing:

Fresno High School Cafeteria and Site Improvements 1839 N Echo Ave Fresno, CA 93704 DSA App No.: 02-120778

This addendum forms a part of the Contract Documents and modifies the original Bidding Documents dated 9/8/2023. Acknowledge all addenda in the space provided on the Bid Form; failure to do so will result in disqualification of the bidder.

GENERAL INFORMATION

1. None

REVISIONS TO PRIOR ADDENDA:

1. None.

REVISIONS TO BIDDING REQUIREMENTS:

1. None.

REVISIONS TO CONDITIONS OF THE CONTRACT:

1. None


REVISIONS TO SPECIFICATIONS:

1. None.

REVISIONS TO DRAWINGS:

1. Add attached C-302 with additional site and fencing requirements.

END OF ADDENDUM

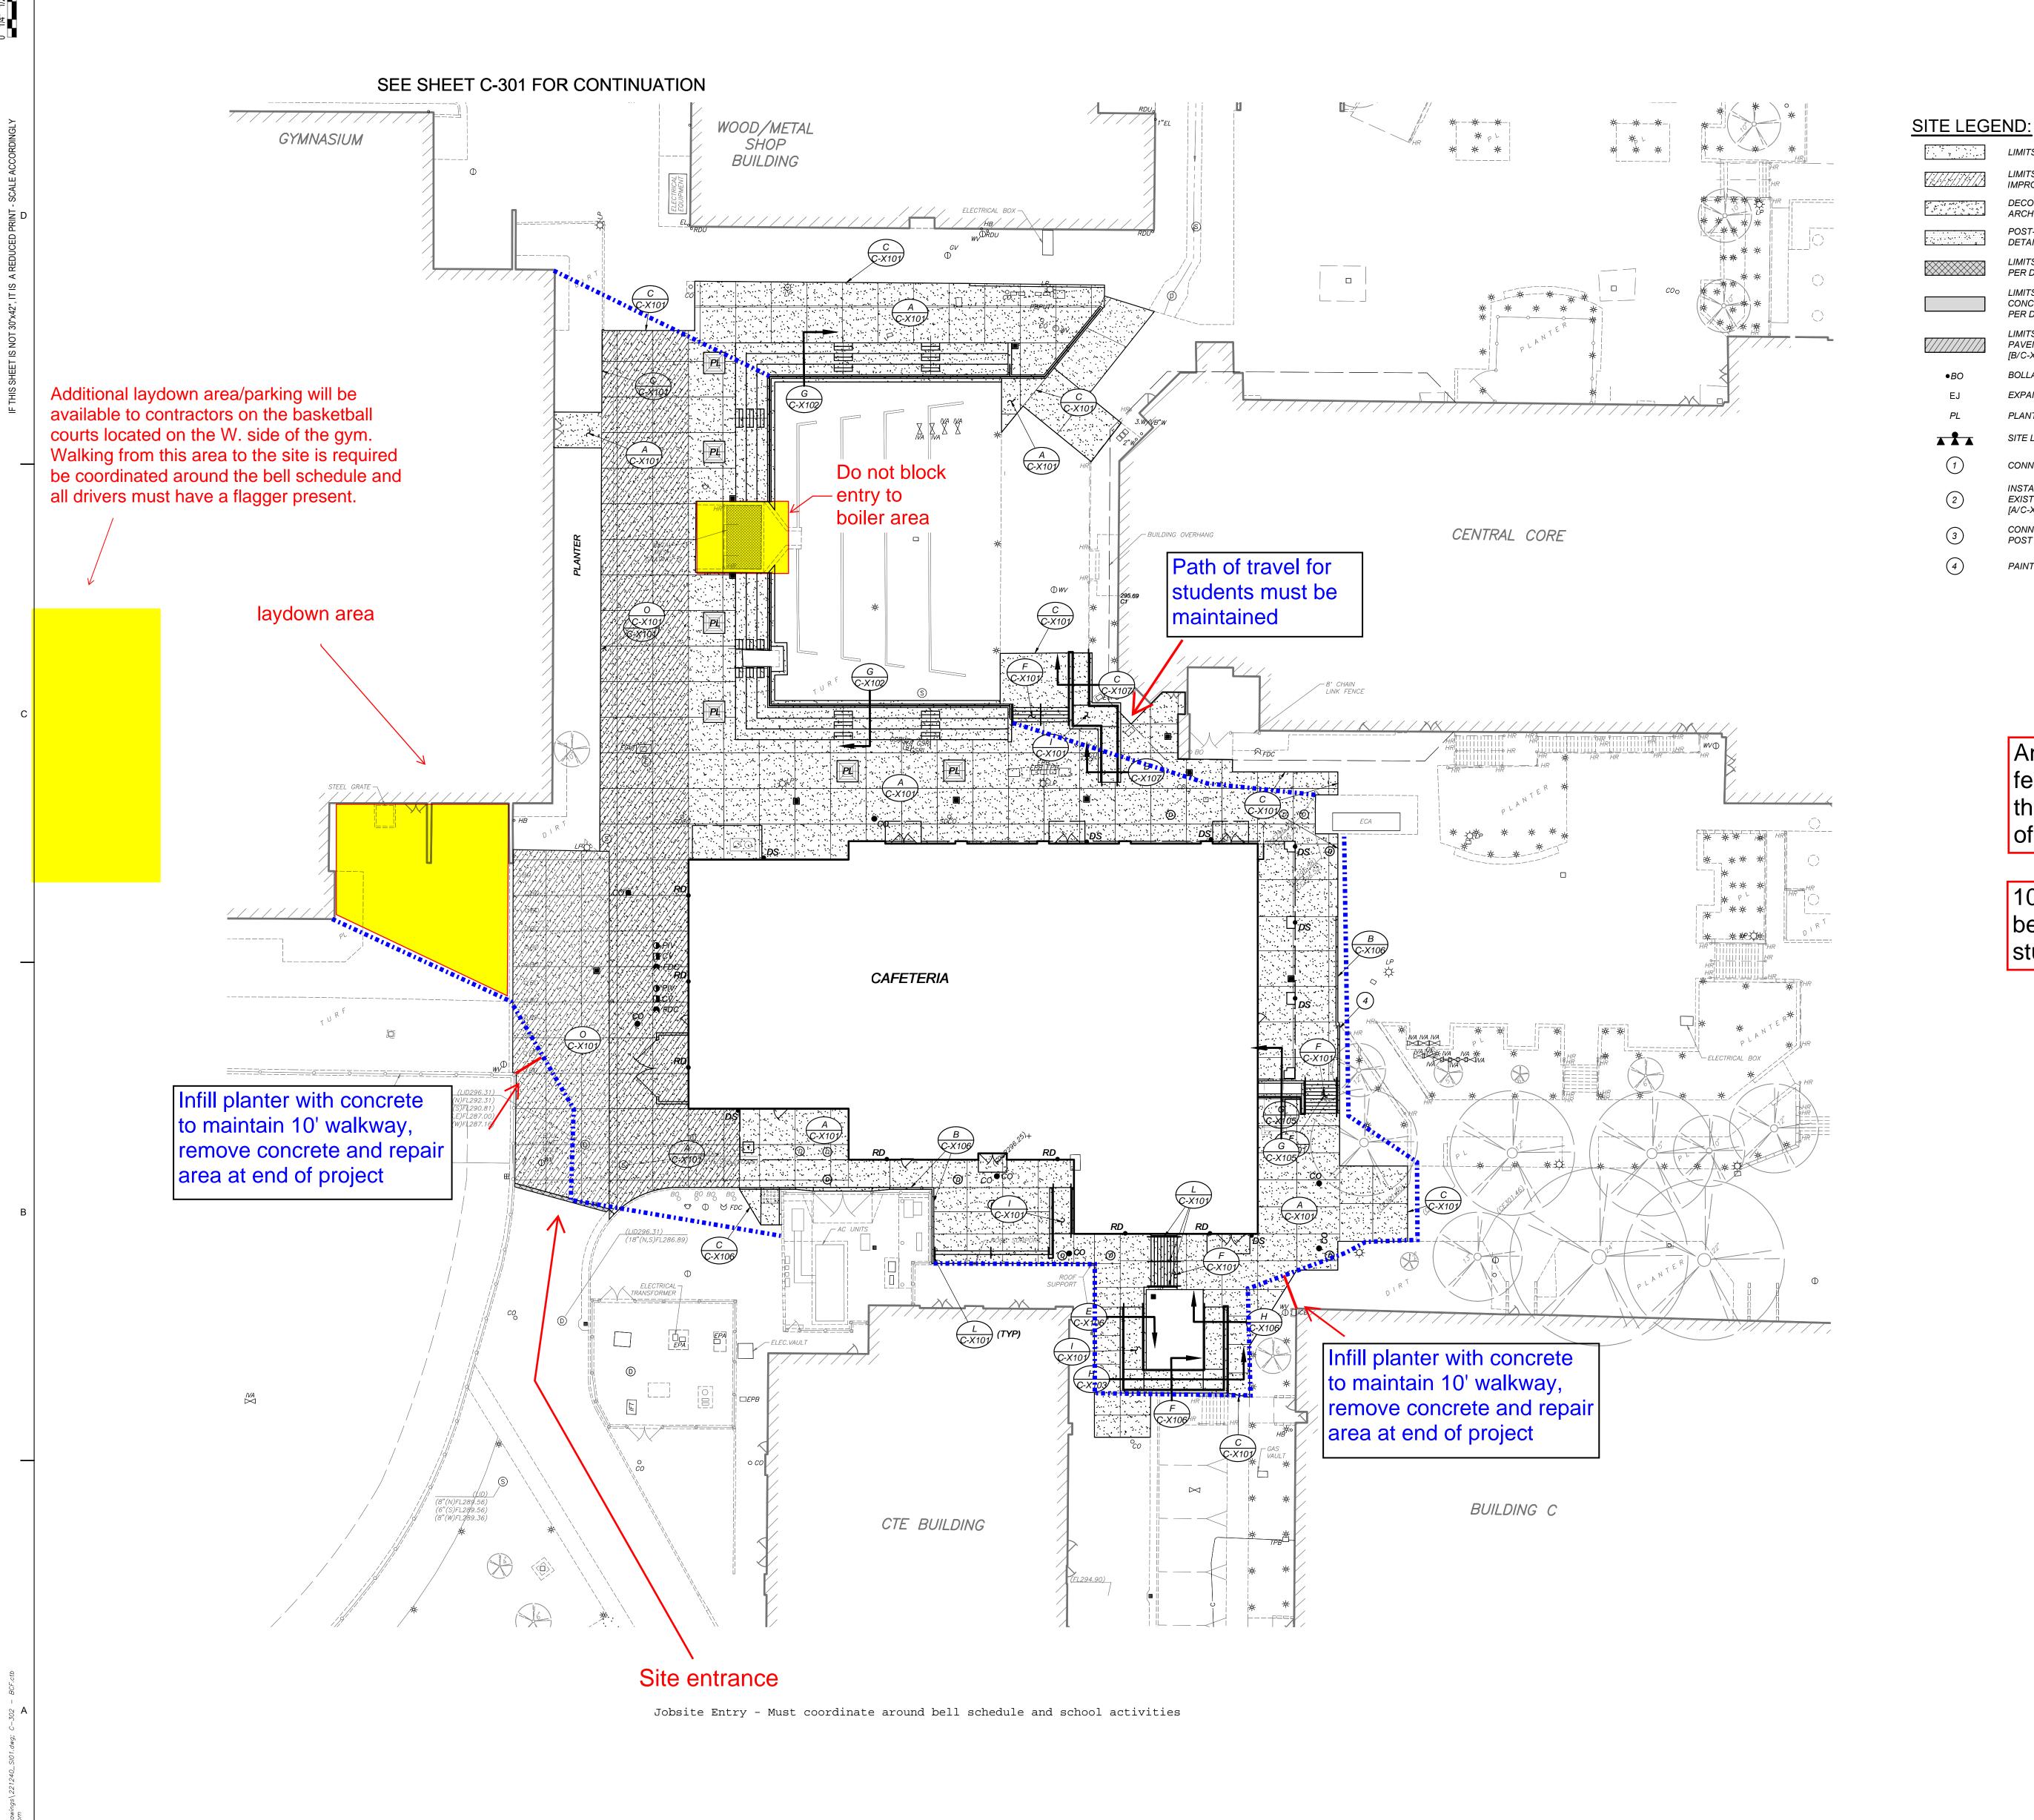

LIMITS OF CONCRETE IMPROVEMENTS LIMITS OF HEAVY DUTY CONCRETE IMPROVEMENTS DECORATIVE CONCRETE, SEE ARCHITECTURAL PLANS DETAIL [G/C-X104]

POST- TENSIONED TENNIS COURT SLAB PER LIMITS OF ASPHALT PLUG IMPROVEMENTS PER DETAIL [P/C-X101]

LIMITS OF REGULAR DUTY ASPHALTIC CONCRETE PAVEMENT STRUCTURAL SECTION PER DETAIL [B/C-X101] LIMITS OF HEAVY DUTY ASPHALTIC CONCRETE PAVEMENT STRUCTURAL SECTION PER DETAIL

BOLLARD PER DETAIL [E/C-X101] EXPANSION JOINT PER DETAIL [E/C-X104] SITE LIGHTING, SEE ELECTRICAL PLANS

CONNECT GATE TO NEW POST INSTALL NEW FENCE POST AND CONNECT TO

CONNECT NEW FENCE FABRIC TO EXISTING POST PER DETAIL [A/C-X103]

EXISTING FENCE FABRIC PER DETAIL

PAINT TOP AND FACE OF CURB YELLOW

GENERAL SITE NOTES:

- 1. ALL CONCRETE MOWSTRIPS, RAMPS AND SIDEWALKS SHALL HAVE WEAKENED PLANE JOINTS AT 10 FEET MAXIMUM ON CENTER AND EXPANSION JOINTS AT 30 FEET MAXIMUM ON CENTER PER DETAIL [A/C-X101]
- 2. INSTALL DOWELED CONNECTION AT JOINT OF NEW CONCRETE TO EXISTING CONCRETE PER DETAIL
- 3. NO CONCRETE MAY BE POURED UNTIL THE FORMS HAVE BEEN REVIEWED AND APPROVED BY THE PROJECT INSPECTOR.
- 4. ALL BURIED METALLIC OBJECTS SHALL HAVE A PROTECTIVE COATING OR BE WRAPPED WITH APPROVED PROTECTIVE WRAP.
- 5. ADJUST EXISTING SPRINKLER HEADS AND LATERAL LINES AS REQUIRED BY NEW IMPROVEMENTS, OR AS SHOWN ON THE IRRIGATION PLANS.
- 6. 2 WORKING DAYS BEFORE COMMENCING EXCAVATION OPERATIONS WITHIN THE STREET RIGHT-OF-WAY AND/OR UTILITY EASEMENTS, ALL EXISTING UNDERGROUND FACILITIES SHALL HAVE BEEN LOCATED BY UNDERGROUND SERVICES ALERT (USA). CALL
- 7. ANY SURVEY MONUMENTS WITHIN THE AREA OF CONSTRUCTION SHALL BE PRESERVED OR RESET BY A PERSON LICENSED TO PRACTICE LAND SURVEYING IN THE STATE OF CALIFORNIA. REPLACEMENT TO BE AT CONTRACTOR'S SOLE EXPENSE.
- 8. OBTAIN ALL REQUIRED PERMITS AND APPROVALS FROM AGENCY HAVING JURISDICTION FOR WORK WITHIN THE PUBLIC RIGHT OF WAY

Any areas outside of the outlined fenced area must be coordinated with the owner prior to performing scope of work.

10' walkway and ADA compliance is to be maintained around all fencing for student path of travel

DESCRIPTION DSA SUBMITTAL

FRESNO HIGH SCHOOL

MODERNIZATION

FRESNO HIGH SCHOOL

1839 N ECHO AVE, FRESNO, CA 93704

FRESNO UNIFIED SCHOOL DISTRICT

2309 TULARE STREET, FRESNO, CA 93721

DSA # 02-120778

IDENTIFICATION STAMP DIV. OF THE STATE ARCHITEC

REVIEWED FOR SS 🗹 FLS 🗹 ACS 🗹

APP: 02-120778 INC:

1919 Nineteenth Street

Sacramento CA 95811

www.lionakis.com

451 Clovis Avenue Clovis, CA 93612

P 559.326.1400


www.bcf-engr.com

P 916.558.1900 F 916.558.1919

BLAIR CHURCH & FLYNN CONSULTING ENGINEERS

MANAGEMENT CLIENT PROJECT NO: LIONAKIS 2022

<u>KEYMAP</u>

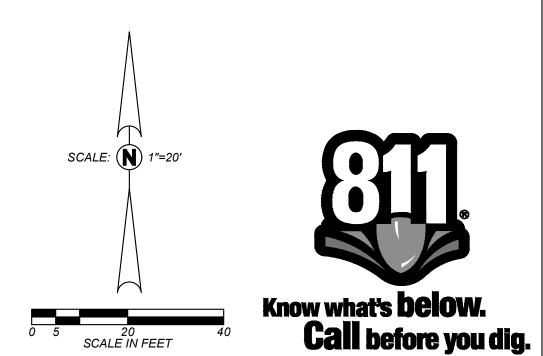

SITE PLAN

C-302